

PP BDFast Compact Straight Fitting



This straight fitting in PP makes it possible to make easy connections with hoses. Normally you will use tubing and fittings to overcome a distance. Now it is possible to make the connection from a Valve, elbow or hull fitting with the convenience of a hose.



Technische Information

Material	:	Polypropylene (PP) EPDM
Colour	:	Black (RAL 9011)
	:	Light grey (RAL 7047)
Operating Pressure	:	16 bar at 20°C
Maximum working temperature	:	80°C
Minimum temperature	:	-5°C

BDFast® Compact Straight Fitting								
Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Maximum Tightning PP	2 Nm	3 Nm	6 Nm	8 Nm	10 Nm	15 Nm	20 Nm	25 Nm

A = Housing /body; B = Split ring; C = Bolt

BDFast® Compact

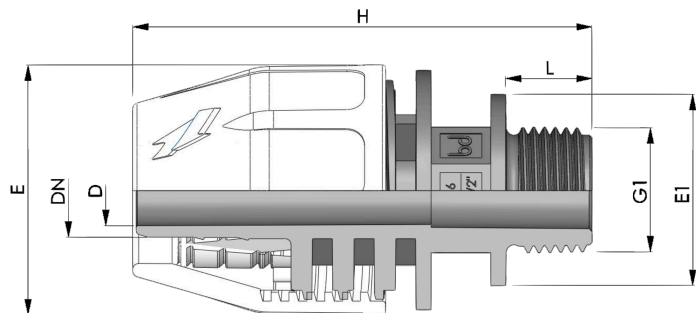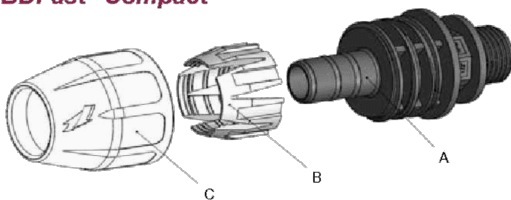

Straight Fitting

Articlenumber	DN mm (inch)	G1	D	L	H	E	E1
5740050210	10 (3/8")	1/2"	7,5	11	91	34,5	32
5740050313	13 (1/2")	1/2"	9,5	14,5	77	38	32
5740050316	16 (5/8")	1/2"	12	14,5	83	42	32
5740050320	20 (25/32")	1/2"	15	14,5	88	49	32
5740050513	13 (1/2")	3/4"	9,5	16	80	38	38
5740050516	16 (5/8")	3/4"	12	16	85	42	38
5740050520	20 (25/32")	3/4"	15	16	90	49	39

In bold means is in stock, others can be ordered on request.